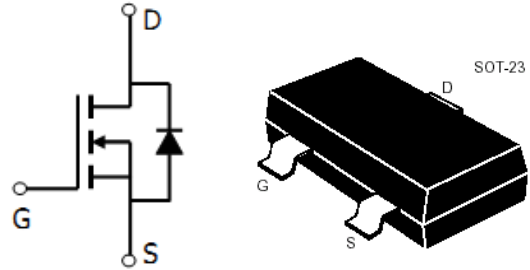


GM2300D

SOT-23 場效應晶體管(SOT-23 Field Effect Transistors)


**N-Channel Enhancement-Mode MOS FETs**

N 沟道增强型 MOS 场效应管

**MAXIMUM RATINGS 最大額定值**

Characteristic 特性參數	Symbol 符號	Max 最大值	Unit 單位
Drain-Source Voltage 漏極-源極電壓	$BV_{DSS}$	20	V
Gate- Source Voltage 柵極-源極電壓	$V_{GS}$	$\pm 8$	V
Drain Current (continuous) 漏極電流-連續	$I_D$	5.6	A
Drain Current (pulsed) 漏極電流-脉冲	$I_{DM}$	18	A
Total Device Dissipation 總耗散功率 $T_A=25^\circ\text{C}$ 環境溫度為 $25^\circ\text{C}$	$P_D$	1250	mW
Junction 結溫	$T_J$	150	$^\circ\text{C}$
Storage Temperature 儲存溫度	$T_{stg}$	-55to+150	$^\circ\text{C}$

**DEVICE MARKING 打標**
**GM2300D=A0D**



GM2300D

■ELECTRICAL CHARACTERISTICS 電特性

( $T_A=25^{\circ}\text{C}$  unless otherwise noted 如無特殊說明，溫度為  $25^{\circ}\text{C}$ )

Characteristic 特性參數	Symbol 符號	Min 最小值	Typ 典型值	Max 最大值	Unit 單位
Drain-Source Breakdown Voltage 漏極-源極擊穿電壓( $I_D = 250\mu\text{A}, V_{GS}=0\text{V}$ )	$BV_{DSS}$	20	—	—	V
Gate Threshold Voltage 柵極開啓電壓( $I_D = 250\mu\text{A}, V_{GS} = V_{DS}$ )	$V_{GS(th)}$	0.45	—	1.2	V
Diode Forward Voltage Drop 內附二極管正向壓降( $I_S = 0.75\text{A}, V_{GS}=0\text{V}$ )	$V_{SD}$	—	—	1.3	V
Zero Gate Voltage Drain Current 零柵壓漏極電流( $V_{GS}=0\text{V}, V_{DS} = 16\text{V}$ ) ( $V_{GS}=0\text{V}, V_{DS} = 16\text{V}, T_A=55^{\circ}\text{C}$ )	$I_{DSS}$	—	—	1 10	$\mu\text{A}$
Gate Body Leakage 柵極漏電流( $V_{GS}=\pm 8\text{V}, V_{DS}=0\text{V}$ )	$I_{GSS}$	—	—	$\pm 100$	nA
Static Drain-Source On-State Resistance 靜態漏源導通電阻( $I_D=5.6\text{A}, V_{GS}=4.5\text{V}$ ) ( $I_D=4\text{A}, V_{GS}=2.5\text{V}$ ) ( $I_D=2\text{A}, V_{GS}=1.8\text{V}$ )	$R_{DS(ON)}$	—	23 32 45	25 35 50	$\text{m}\Omega$
Input Capacitance 輸入電容 ( $V_{GS}=0\text{V}, V_{DS} = 10\text{V}, f=1\text{MHz}$ )	$C_{ISS}$	—	—	650	pF
Common Source Output Capacitance 共源輸出電容( $V_{GS}=0\text{V}, V_{DS} = 10\text{V}, f=1\text{MHz}$ )	$C_{OSS}$	—	—	150	pF
Turn-ON Time 開啓時間 ( $V_{DS} = 10\text{V}, I_D = 3.5\text{A}, R_{GEN}=10\Omega$ )	$t_{(on)}$	—	—	20	ns
Turn-OFF Time 關斷時間 ( $V_{DS} = 10\text{V}, I_D = 3.5\text{A}, R_{GEN}=10\Omega$ )	$t_{(off)}$	—	—	60	ns

Pulse Width $\leq 300\mu\text{s}$ ; Duty Cycle $\leq 2.0\%$



**宇芯微**  
YSMICRO


**东莞市宇芯电子有限公司**  
DONGGUAN YUSHIN ELECTRONICS CO.,LTD  
电话: 0769-89268116 传真: 0769-89268117

**GM2300D**

GM2300D

■DIMENSION 外形封装尺寸

單位(UNIT): mm

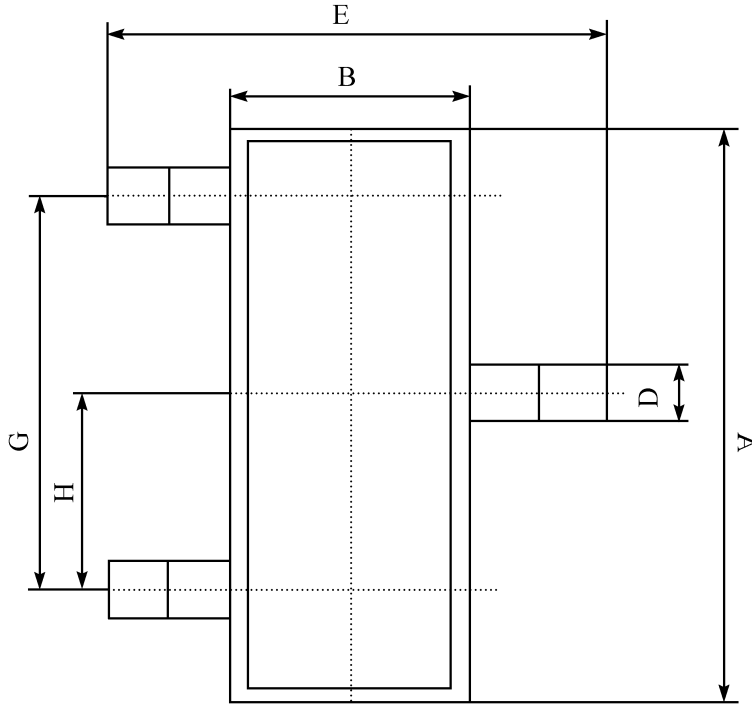

序號	數值及公差
A	2.90±0.10
B	1.30±0.10
C	1.00±0.10
D	0.40±0.10
E	2.40±0.20
G	1.90±0.10
H	0.95±0.05
J	0.13±0.05
K	0.00-0.10
M	≥0.2
N	0.60±0.10
P	7±2°

