



First Semiconductor

Advanced N-Ch Power MOSFET-Y

FIR18N50FG

PIN Connection TO-220F


General Description

FIR18N50FG is an N-channel enhancement mode power MOS field effect transistor which is produced using Silan proprietary F-Cell™ structure VDMOS technology. The improved planar stripe cell and the improved guard ring terminal have been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode.


These devices are widely used in AC-DC power suppliers, DC-DC converters and H-bridge PWM motor drivers.

Features

- 18A,500V, $R_{DS(on)(typ)}$ =0.35Ω @ $V_{GS} = 10V$
- Low gate charge
- Low Crss
- Fast switching
- Improved dv/dt capability



Schematic diagram



Marking Diagram



Y = Yea
 A = Assembly Location
 WW = Work Week
 VT = Version & Thickness
 FIR18N50F = Specific Device Code

Absolute Maximum Ratings (Ta = 25°C unless otherwise noted)

Characteristics		Symbol	Ratings	Unit
Drain-Source Voltage		V_{DS}	500	V
Gate-Source Voltage		V_{GS}	±30	V
Drain Current	$T_C=25^\circ C$	I_D	18.0	A
	$T_C=100^\circ C$		10.8	
Drain Current Pulsed		I_{DM}	68	A
Power Dissipation($T_C=25^\circ C$) -Derate above 25°C		P_D	48	W
			0.38	W/°C
Single Pulsed Avalanche Energy (Note 1)		E_{AS}	480	mJ
Operation Junction Temperature Range		T_J	-55~+150	°C
Storage Temperature Range		T_{stg}	-55~+150	°C

**Thermal Characteristics**

Characteristics	Symbol	Ratings	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	2.60	°C/W
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	120	°C/W

Electrical Characteristics (Ta = 25°C unless otherwise noted)

Characteristics	Symbol	Test conditions	Min.	Typ.	Max.	Unit
Drain -Source Breakdown Voltage	B_{VDSS}	25 °C, $V_{GS}=0V$, $I_D=250\mu A$	500	--	--	V
		125 °C, $V_{GS}=0V$, $I_D=250\mu A$	500	--	--	V
Drain-Source Leakage Current	I_{DSS}	25 °C, $V_{DS}=500V$, $V_{GS}=0V$	--	--	1.0	μA
		125 °C, $V_{DS}=500V$, $V_{GS}=0V$	--	--	50	μA
		150 °C, $V_{DS}=500V$, $V_{GS}=0V$	--	--	100	μA
Gate-Source Leakage Current	I_{GSS}	$V_{GS}=\pm 30V$, $V_{DS}=0V$	--	--	± 100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{GS}=V_{DS}$, $I_D=250\mu A$	2.0	--	4.0	V
Static Drain- Source On State Resistance	$R_{DS(on)}$	$V_{GS}=10V$, $I_D=9.0A$	--	0.32	0.45	Ω
Input Capacitance	C_{iss}	$V_{DS}=25V$, $V_{GS}=0V$, $f=1.0MHz$	--	3000	--	pF
Output Capacitance	C_{oss}		--	221	--	
Reverse Transfer Capacitance	C_{rss}		--	15	--	
Turn-on Delay Time	$t_{d(on)}$	$V_{DD}=250V$, $I_D=18.0A$, $R_G=25\Omega$	--	36	--	ns
Turn-on Rise Time	t_r		--	82	--	
Turn-off Delay Time	$t_{d(off)}$		--	110	--	
Turn-off Fall Time	t_f		--	78	--	
Total Gate Charge	Q_g	$V_{DS}=400V$, $I_D=18.0A$, $V_{GS}=10V$	--	42	--	nC
Gate-Source Charge	Q_{gs}		--	14.5	--	
Gate-Drain Charge	Q_{gd}		--	7	--	







Source-Drain Diode Ratings And Characteristics

Characteristics	Symbol	Test conditions	Min.	Typ.	Max.	Unit
Continuous Source Current	I_s	Integral Junction Diode in the MOSFET	--	--	18.0	A
Pulsed Source Current	I_{SM}		--	--	68.0	
Diode Forward Voltage	V_{SD}	$I_s=18.0A$, $V_{GS}=0V$	--	--	1.5	V
Reverse Recovery Time	T_{rr}	$I_s=18.0A$, $V_{GS}=0V$, $dI_F/dt=100A/\mu S$ (Note 2)	--	400	--	ns
Reverse Recovery Charge	Q_{rr}		--	5.5	--	μC

Notes:

1. $L=30mH$, $I_{AS}=7.80A$, $V_{DD}=100V$, $R_G=25\Omega$, starting $T_J=25^\circ C$;
2. Essentially independent of operating temperature.
3. Pulse Test: Pulse width $\leq 300\mu s$, Duty cycle $\leq 2\%$;

Typical Characteristics

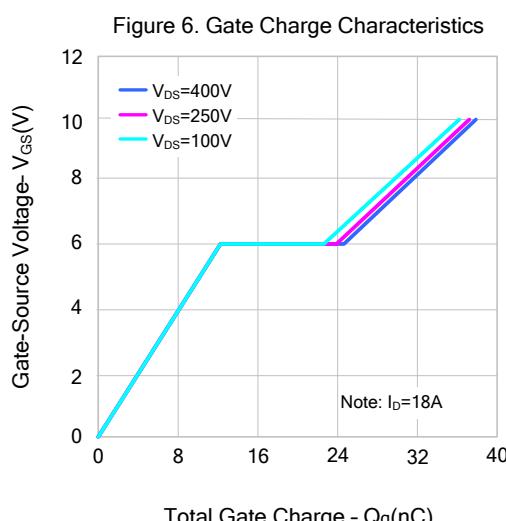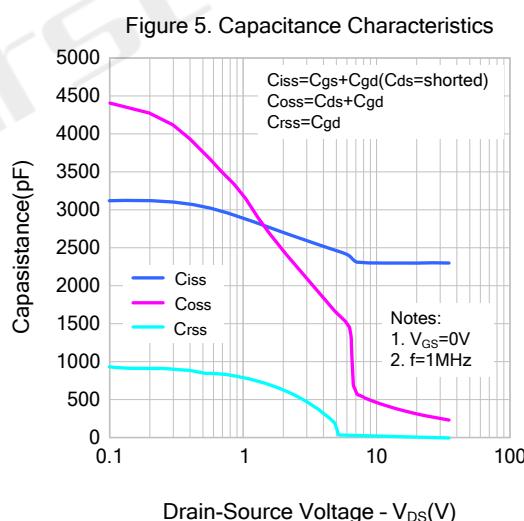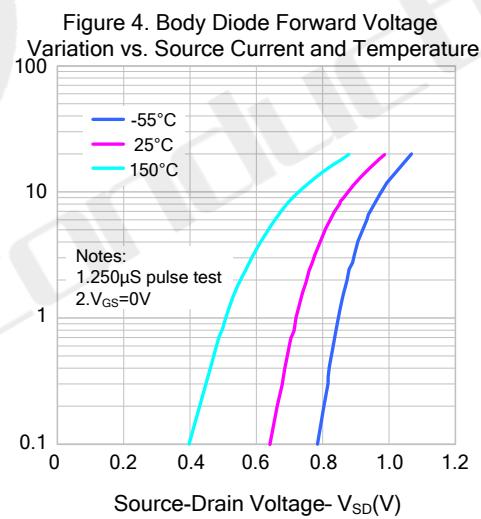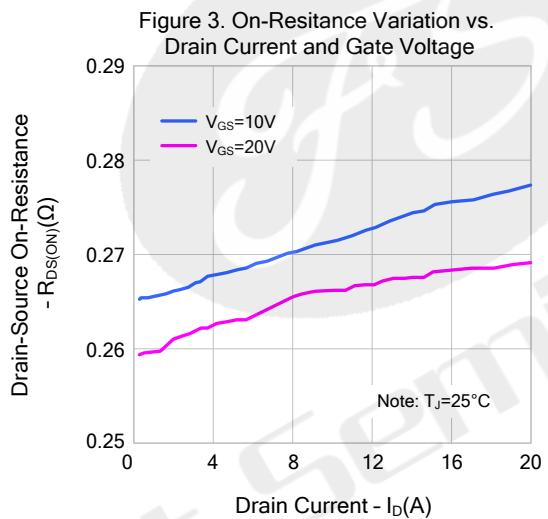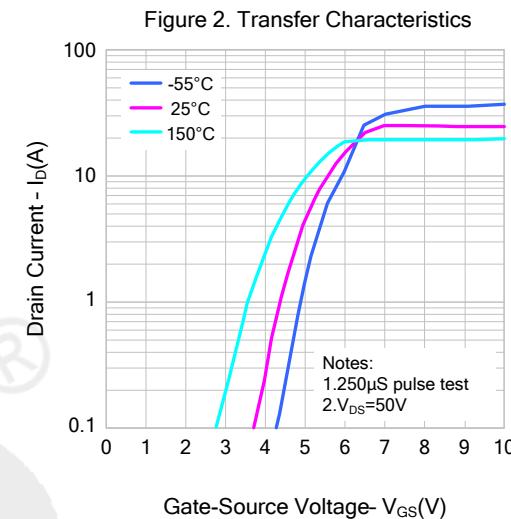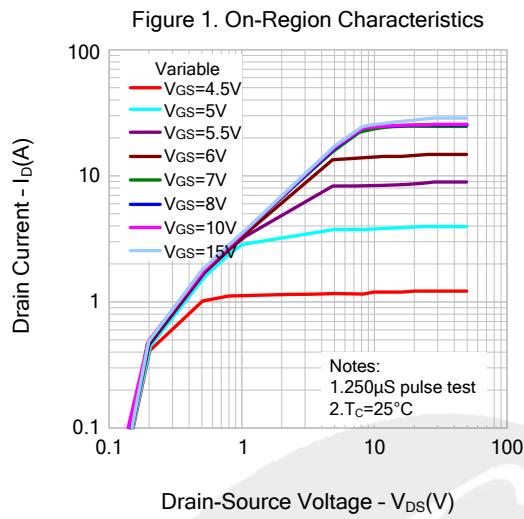

Typical Characteristics(Continued)

Figure 7. Breakdown Voltage Variation vs. Temperature

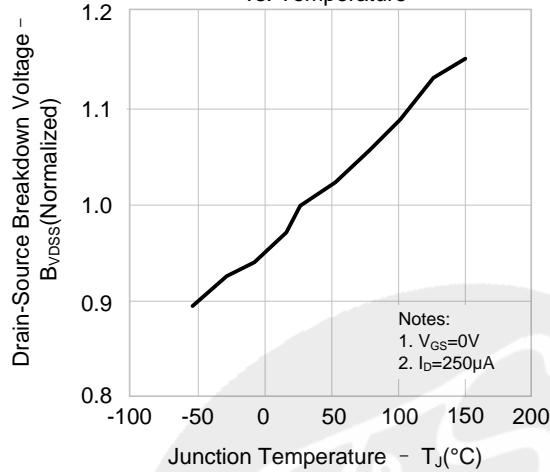


Figure 8. On-resistance Variation vs. Temperature

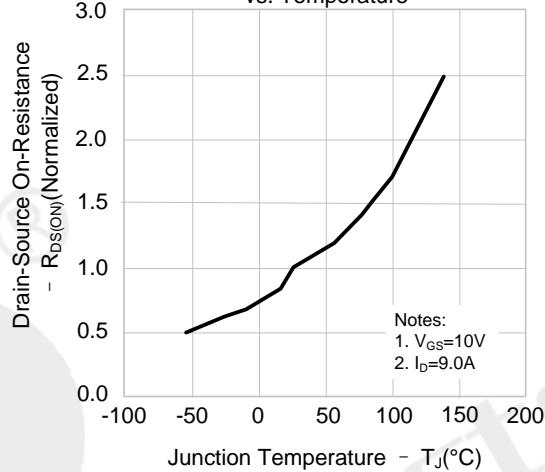


Figure 9. Max. Safe Operating Area(FIR18N50FG)



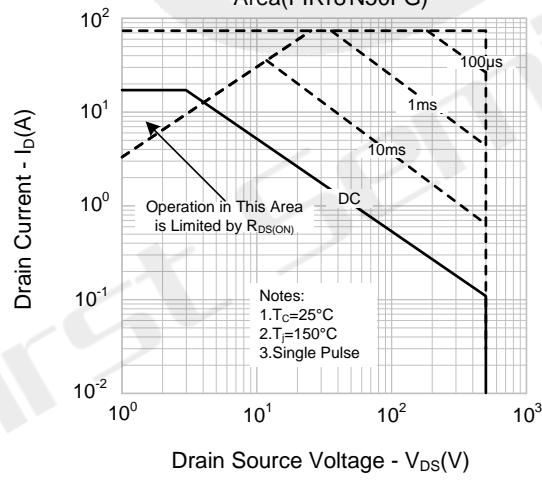


Figure 10. Maximum Drain Current vs. Case Temperature

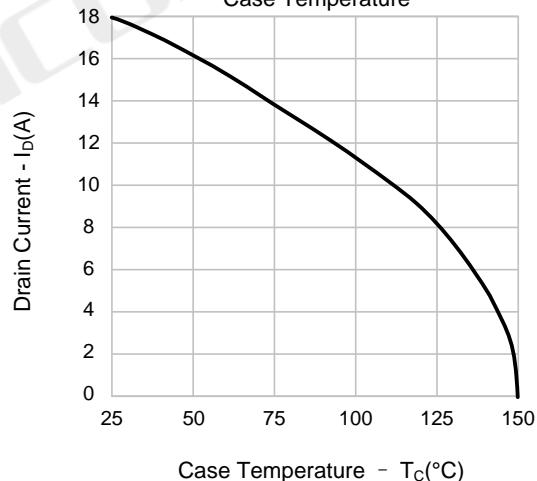


Typical Test Circuit


Gate Charge Test Circuit & Waveform

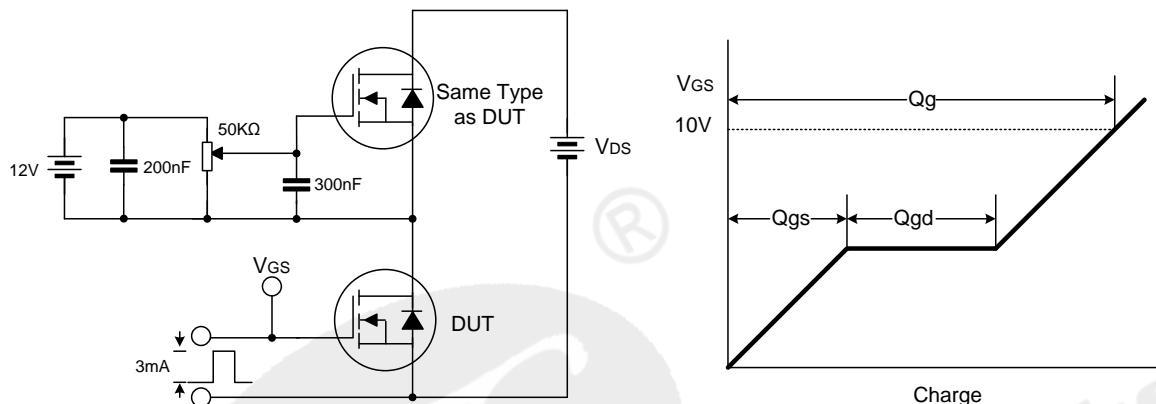

Resistive Switching Test Circuit & Waveform

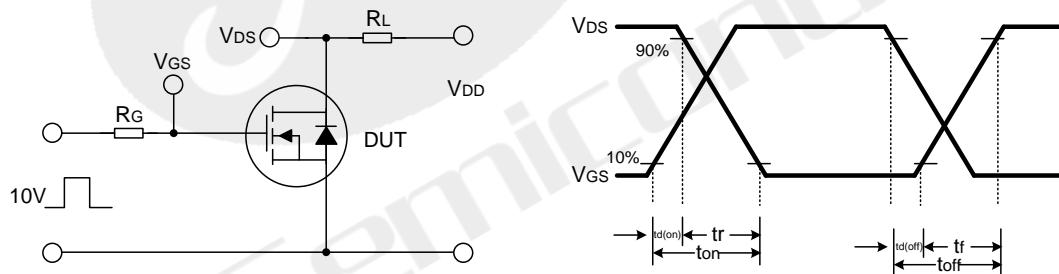


Unclamped Inductive Switching Test Circuit & Waveform

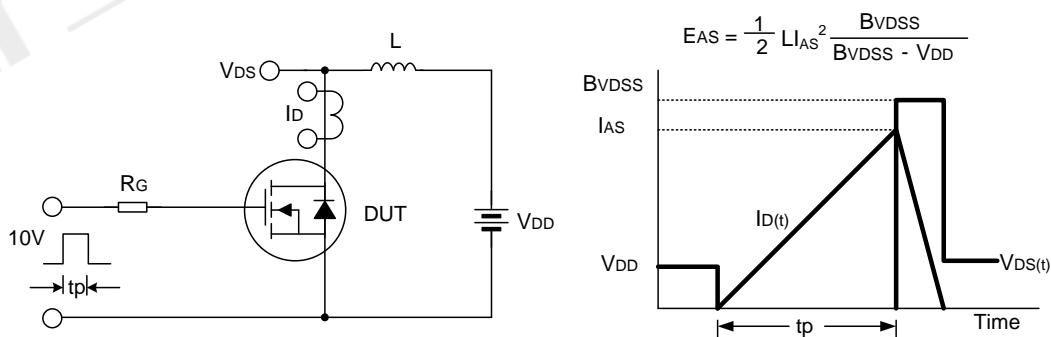

Package Dimensions

TO-220F

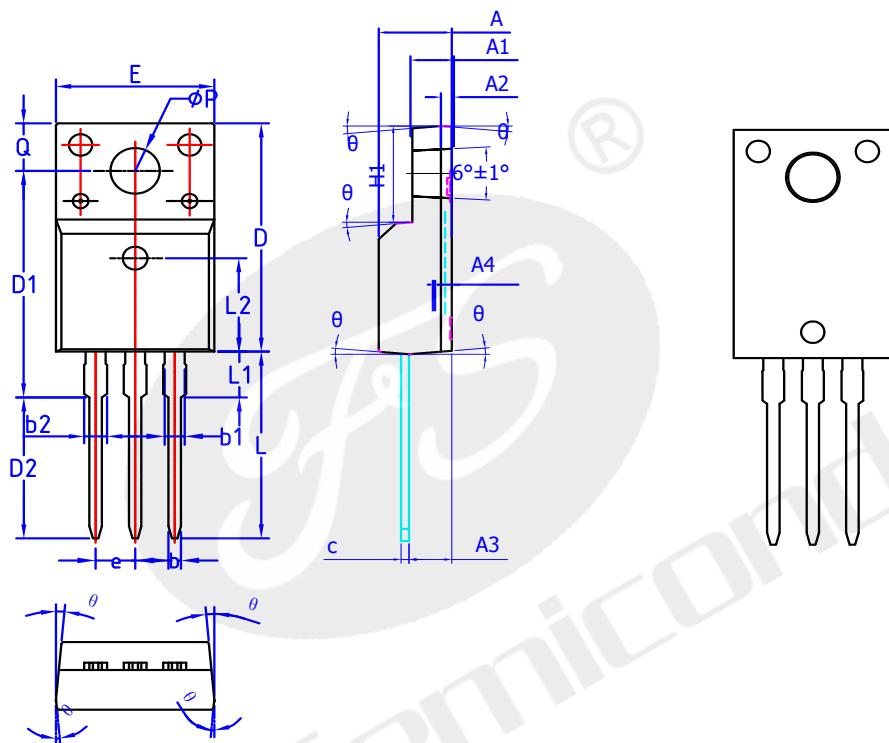

Units: mm

 COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	4.50	4.70	4.90
A1	2.34	2.54	2.74
A2		0.70 REF	
A3	2.56	2.76	2.96
b	0.70	0.80	0.90
b1	1.17	1.2	1.25
b2	1.17	1.2	1.25
c	0.45	0.50	0.60
D	15.67	15.87	16.07
D1	15.55	15.75	15.95
D2	10.0	10.2	10.4
E	9.96	10.16	10.36
e		2.54 BSC	
H1	6.48	6.68	6.88
L	12.68	12.98	13.28
L1	-	-	3.50
L2		6.50 REF	
ΦP	3.08	3.18	3.28
Q	3.20	3.30	3.40
θ1	1°	3°	5°
A4	0.53	0.56	0.59



Declaration

- FIRST reserves the right to change the specifications, the same specifications of products due to different packaging line mold, the size of the appearance will be slightly different, shipped in kind, without notice! Customers should obtain the latest version information before ordering, and verify whether the relevant information is complete and up-to-date.
- Any semiconductor product under certain conditions has the possibility of failure or failure, The buyer has the responsibility to comply with safety standards and take safety measures when using FIRST products for system design and manufacturing, To avoid potential failure risks, which may cause personal injury or property damage!
- Product promotion endless, our company will wholeheartedly provide customers with better products!

ATTACHMENT

Revision History

Date	REV	Description	Page
2018.01.01	1.0	Initial release	