


## ESDULC5V0D9B

### Description

ESDULC5V0D9B is designed to protect voltage sensitive components from ESD and transient voltage events. Excellent clamping capability, low leakage, and fast response time, make these parts ideal for ESD protection on designs where board space is at a premium. Because of its low capacitance, it is suited for use in high frequency designs such as USB 2.0 high speed and antenna line applications.




### Features

- Ultra low capacitance 0.5pF
- Stand-off voltage: 5V
- Low leakage current
- Package: SOD-923
- Low clamping voltage
- Response time is typically <1.0ns
- Complies with following standards:
  - IEC 61000-4-2 (ESD) immunity test

Air discharge: ±15kV

Contact discharge: ±8kV

### Functional Diagram

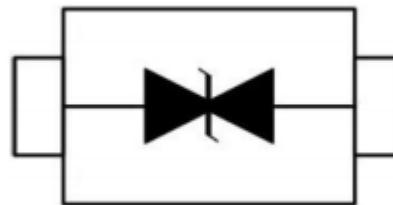

### Applications

- USB 2.0
- antenna line
- Data line

### Absolute Maximum Ratings(Tamb=25 °C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20μs)	P <sub>PP</sub>	150	Watts
ESD per IEC 61000-4-2 (Air)	V <sub>ESD</sub>	±15	kV
ESD per IEC 61000-4-2 (Contact)		±8	kV
Lead Soldering Temperature	T <sub>L</sub>	260 (10 sec)	°C
Operating Temperature Range	T <sub>J</sub>	-55 to +125	°C
Storage Temperature Range	T <sub>STJ</sub>	-55 to +150	°C

**Electrical Characteristics (TA = 25 °C unless otherwise noted)**

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Reverse Stand-off Voltage	VRWM				5	V
Reverse Breakdown Voltage	VBR	It = 1mA	5.4			V
Reverse Leakage Current	IR	VR = VRWM			1	µA
Clamping Voltage	VC	@IPP=1A			12.9	V
Junction Capacitance	CJ	VR=0V, f = 1MHz			0.9	pF

**Characteristics Curves**

Figure 1- ESD Pulse Waveform  
(according to IEC 61000-4-2)

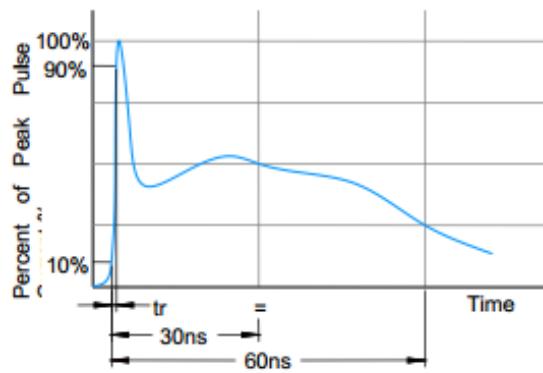


Figure 2- ESD VC Screenshot positive 8KV contact per  
IEC 61000-4-2




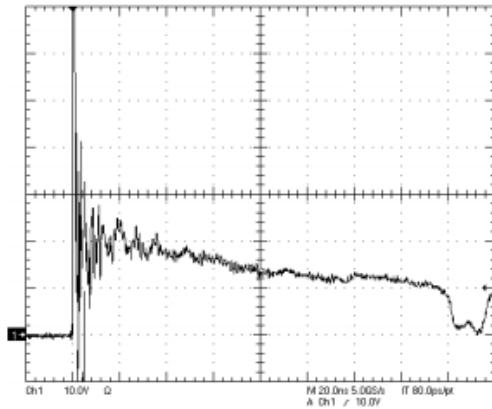


Figure3- Figure 2- ESD VC Screenshot negative 8KV  
contact per IEC 61000-4-2

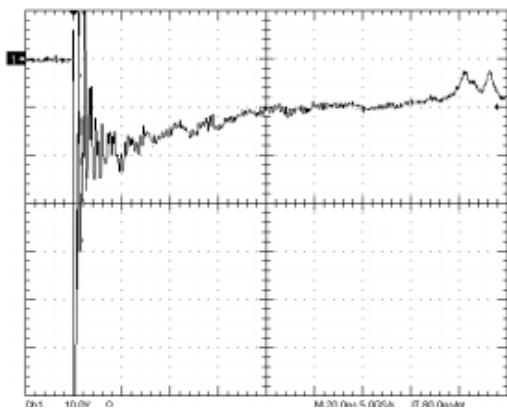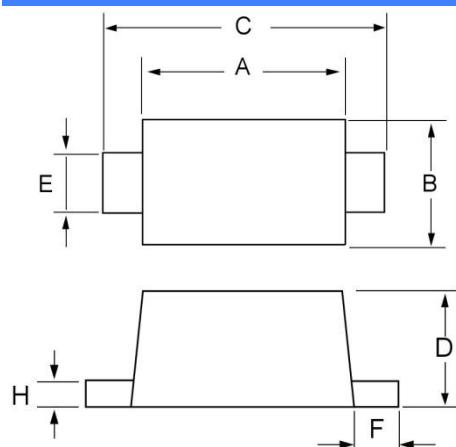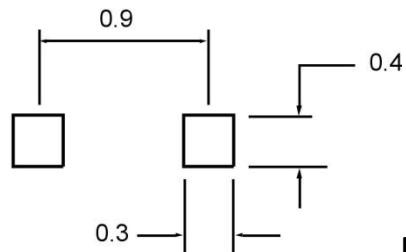

**PACKAGE OUTLINE DIMENSIONS in millimeters (inches) :**


Dim	Inches		Millimeters	
	MIN	MAX	MIN	MAX
A	0.030	0.033	0.75	0.85
B	0.022	0.026	0.55	0.65
C	0.037	0.041	0.95	1.05
D	0.014	0.017	0.36	0.43
E	0.006	0.010	0.15	0.25
F	0.002	0.006	0.05	0.15
H	0.003	0.007	0.07	0.17


**Mounting Pad Layout(mm)**
**Disclaimer**

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.