

## Description

### N-channel MOSFET


#### Features

- 100V,15A
- $R_{DS(ON)} = 95m\Omega$  (Typ.) @  $V_{GS} = 10V$
- $R_{DS(ON)} = 100m\Omega$  (Typ.) @  $V_{GS} = 4.5V$
- Low Total Gate Charge
- Low Reverse Transfer Capacitance
- Improved dv/dt Capability
- Fast Switching Speed


#### Application

- Uninterruptible Power Supply(UPS)
- Inverter System

#### Package



TO-252  
YS15N10D



### Absolute Maximum Ratings (T<sub>c</sub>=25°C unless otherwise specified)

Symbol	Parameter	Max.	Units
V <sub>DSS</sub>	Drain-Source Voltage	100	V
V <sub>GSS</sub>	Gate-Source Voltage	±20	V
I <sub>D</sub>	Continuous Drain Current	T <sub>c</sub> = 25°C	15
		T <sub>c</sub> = 100°C	10
I <sub>DM</sub>	Pulsed Drain Current <sup>note1</sup>	60	A
P <sub>D</sub>	Power Dissipation	T <sub>c</sub> = 25°C	55
R <sub>θJC</sub>	Thermal Resistance, Junction to Case	2.72	°C/W
T <sub>J</sub> , T <sub>STG</sub>	Operating and Storage Temperature Range	-55 to +175	°C


**Electrical Characteristics** ( $T_C=25^{\circ}\text{C}$  unless otherwise specified)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Units
<b>Off Characteristic</b>						
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	100	-	-	V
$I_{DSS}$	Zero Gate Voltage Drain Current	$V_{DS}=100V, V_{GS}=0V, T_J=25^{\circ}\text{C}$	-	-	1.0	$\mu A$
$I_{GSS}$	Gate to Body Leakage Current	$V_{DS}=0V, V_{GS}=\pm 20V$	-	-	$\pm 100$	nA
<b>On Characteristics</b>						
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu A$	1.0	1.6	3.0	V
$R_{DS(on)}$	Static Drain-Source on-Resistance note2	$V_{GS}=10V, I_D=10A$	-	95	110	m $\Omega$
		$V_{GS}=4.5V, I_D=5A$	-	100	130	M $\omega$
$g_{FS}$	Forward Transconductance	$V_{GS}=5V, I_D=4A$	2	-	-	S
<b>Dynamic Characteristics</b>						
$C_{iss}$	Input Capacitance	$V_{DS}=50V, V_{GS}=0V, f=1.0\text{MHz}$	-	632	-	pF
$C_{oss}$	Output Capacitance		-	37	-	pF
$C_{riss}$	Reverse Transfer Capacitance		-	21	-	pF
$Q_g$	Total Gate Charge	$V_{DS}=80V, I_D=10A$	-	19.2	-	nC
$Q_{gs}$	Gate-Source Charge		-	3.4	-	nC
$Q_{gd}$	Gate-Drain("Miller") Charge		-	6.1	-	nC
<b>Switching Characteristics</b>						
$t_{d(on)}$	Turn-on Delay Time	$V_{GS}=10V, V_{DD}=50V, R_L=2.8, R_{REN}=6, I_D=10A$	-	12.6	-	ns
$t_r$	Turn-on Rise Time		-	6	-	ns
$t_{d(off)}$	Turn-off Delay Time		-	32.5	-	ns
$t_f$	Turn-off Fall Time		-	4.3	-	ns
<b>Drain-Source Diode Characteristics and Maximum Ratings</b>						
$I_S$	Maximum Continuous Drain to Source Diode Forward Current		-	-	15	A
$I_{SM}$	Maximum Pulsed Drain to Source Diode Forward Current		-	-	60	A
$V_{SD}$	Drain to Source Diode Forward Voltage	$V_{GS}=0V, I_S=10A$	-	-	1.2	V


Notes:1. Repetitive Rating: Pulse Width Limited by Maximum Junction Temperature

 2. Pulse Test: Pulse Width $\leq 300\mu s$ , Duty Cycle $\leq 2\%$


**Typical Performance Characteristics**

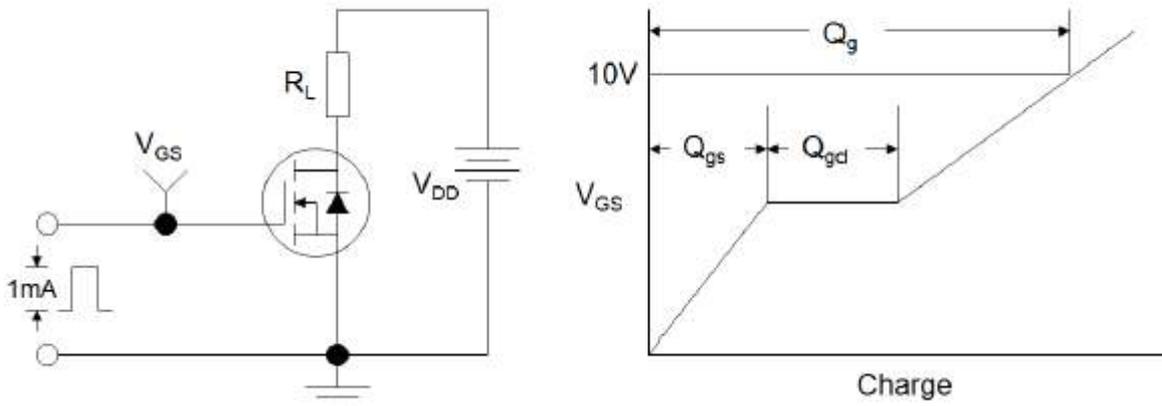

**Figure1:Gate Charge Test Circuit & Waveform**

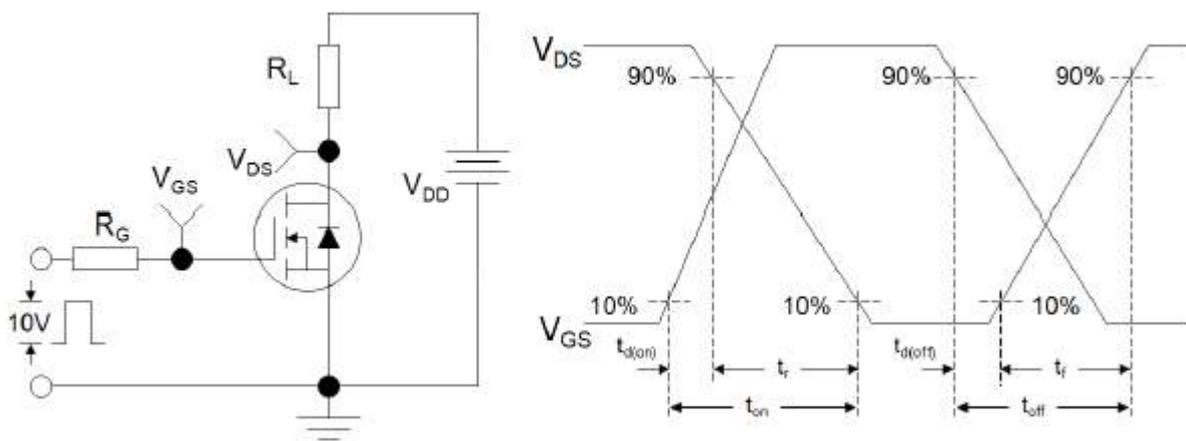

**Figure 2: Resistive Switching Test Circuit & Waveforms**

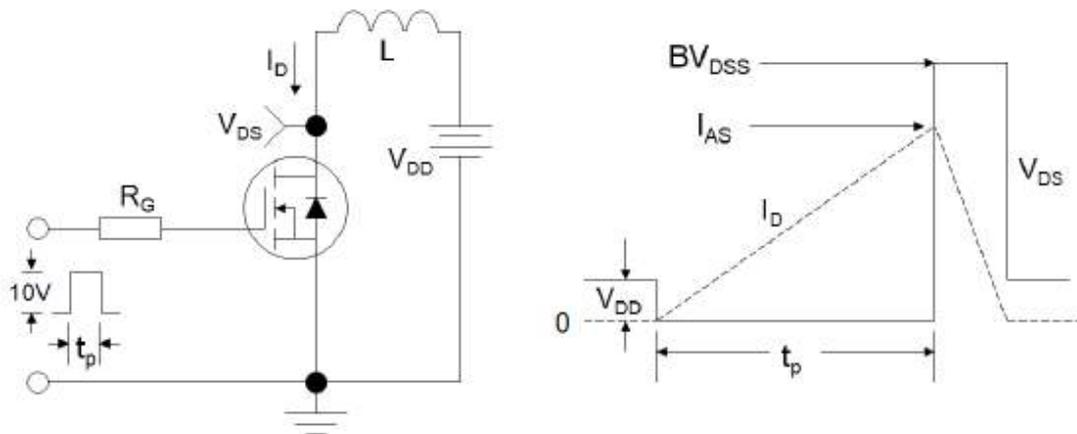

**Figure 3:Unclamped Inductive Switching Test Circuit & Waveforms**



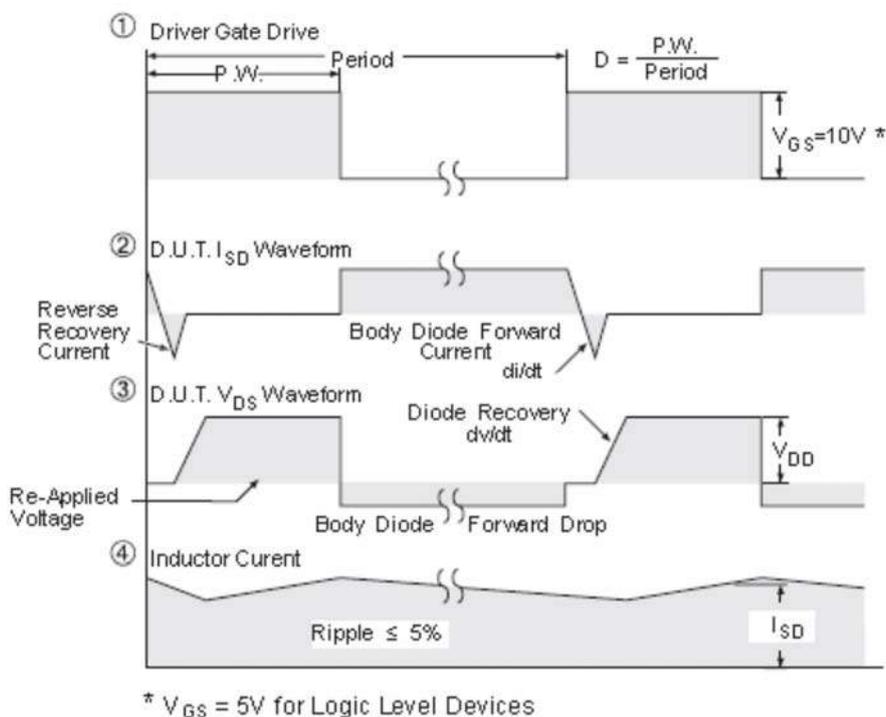



Figure 4: Peak Diode Recovery  $dv/dt$  Test Circuit & Waveforms (For N-channel)

## Package Mechanical Data

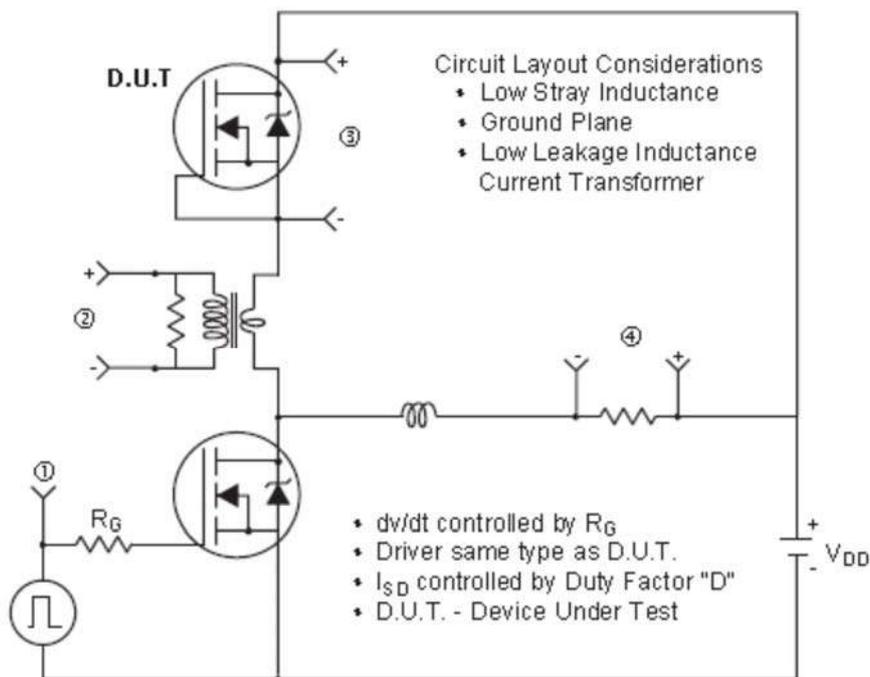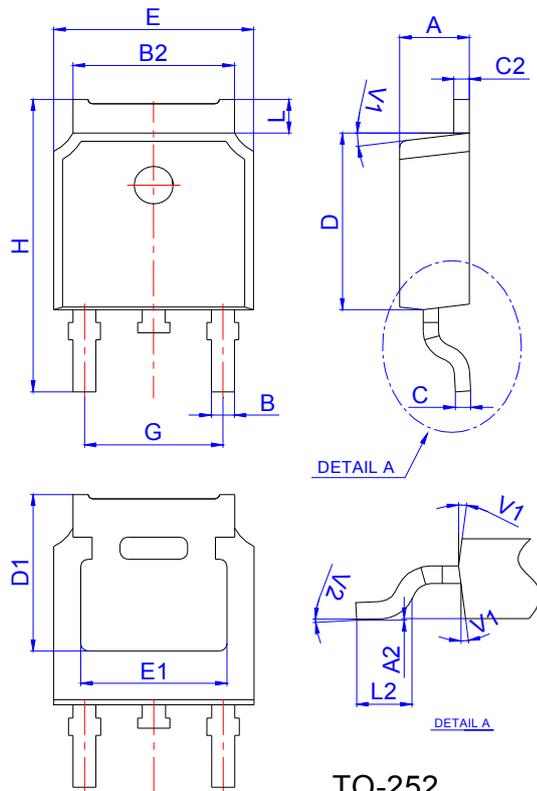

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.10		2.50	0.083		0.098
A2	0		0.10	0		0.004
B	0.66		0.86	0.026		0.034
B2	5.18		5.48	0.202		0.216
C	0.40		0.60	0.016		0.024
C2	0.44		0.58	0.017		0.023
D	5.90		6.30	0.232		0.248
D1	5.30REF			0.209REF		
E	6.40		6.80	0.252		0.268
E1	4.63			0.182		
G	4.47		4.67	0.176		0.184
H	9.50		10.70	0.374		0.421
L	1.09		1.21	0.043		0.048
L2	1.35		1.65	0.053		0.065
V1		7°			7°	
V2	0°		6°	0°		6°

## Reel Specification-TO-252

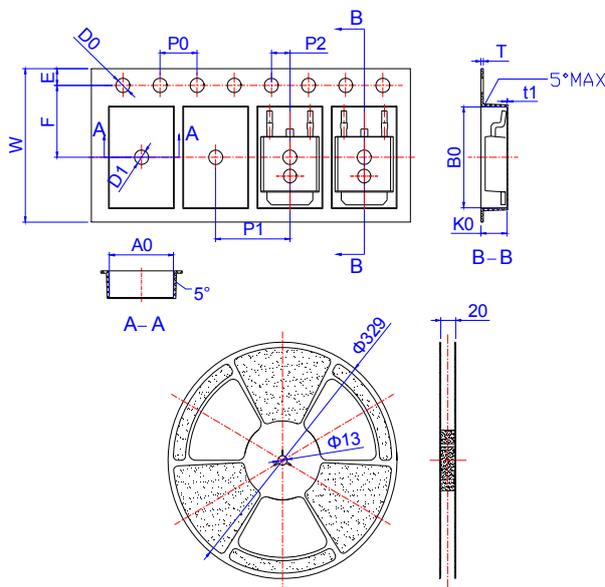

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
W	15.90	16.00	16.10	0.626	0.630	0.634
E	1.65	1.75	1.85	0.065	0.069	0.073
F	7.40	7.50	7.60	0.291	0.295	0.299
D0	1.40	1.50	1.60	0.055	0.059	0.063
D1	1.40	1.50	1.60	0.055	0.059	0.063
P0	3.90	4.00	4.10	0.154	0.157	0.161
P1	7.90	8.00	8.10	0.311	0.315	0.319
P2	1.90	2.00	2.10	0.075	0.079	0.083
A0	6.85	6.90	7.00	0.270	0.271	0.276
B0	10.45	10.50	10.60	0.411	0.413	0.417
K0	2.68	2.78	2.88	0.105	0.109	0.113
T	0.24		0.27	0.009		0.011
t1	0.10			0.004		
10P0	39.80	40.00	40.20	1.567	1.575	1.583

OUTLINE	REEL (PCS)	PER CARTON (PCS)	TAPE & REEL
TAPING	2,500	25,000	13inch